


Helical fittings Distribution dead ends

FOR USE ON ALUMINIUM BASED CONDUCTORS

AAC - AAAC - ACSR - ACAR

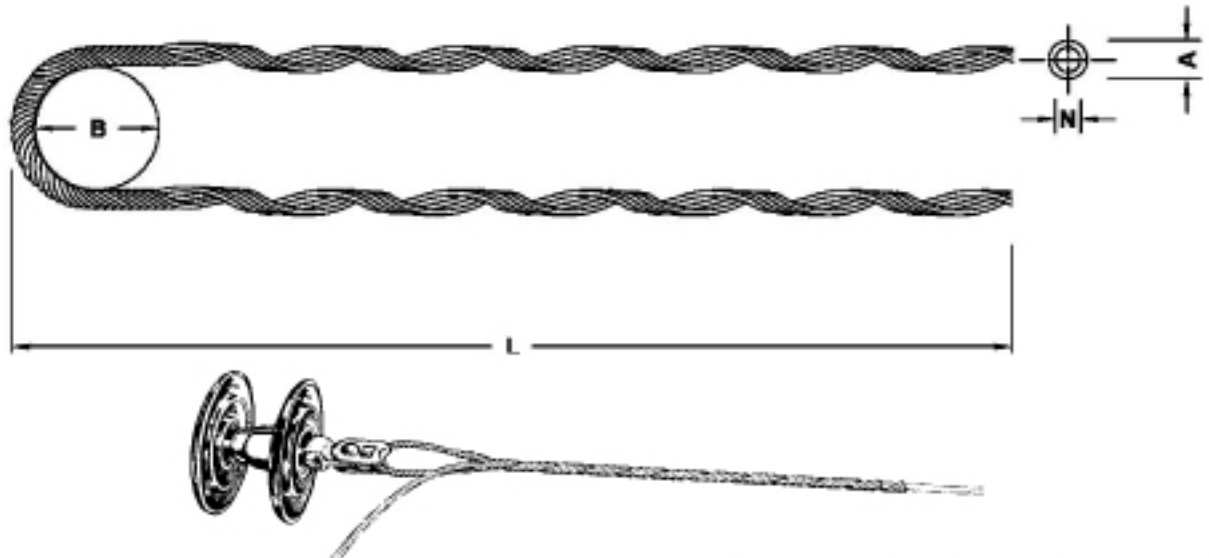

CATALOG	COND. DIA		L	A	N OPEN HELIX	N CABLED LOOP	B MIN	B MAX	COLOUR
	MIN	MAX							
AWDG-008	4.62	5.17	390	8.8	8.8	6.0	28	60	YELLOW
AWDG-009	5.18	5.81	405	10.0	10.0	10.0	28	60	GREEN
AWDG-010	5.82	6.54	430	10.5	10.5	11.5	30	60	BLUE
AWDG-011	6.55	7.36	560	11.5	11.5	12.2	30	60	RED
AWDG-012	7.37	8.27	610	12.2	12.2	14.0	30	60	YELLOW
AWDG-013	8.28	9.26	660	14.0	14.0	14.9	30	60	BLACK
AWDG-014	9.27	10.4	660	14.9	14.9	16.2	40	60	ORANGE
AWDG-015	10.41	11.70	710	16.2	16.2	9.0	40	60	RED
AWDG-016	11.71	13.12	815	17.8	17.8	9.5	40	60	GREEN
AWDG-017	13.13	14.67	865	19.9	19.9	10.5	40	60	WHITE
AWDG-018	14.68	16.60	890	20.4		11.0	40	60	BLUE
AWDG-019	16.61	18.79	990	23.0		12.5	40	60	YELLOW
AWDG-020	18.80	21.38	1270	25.9		14.0	40	60	BLACK

PLEASE ADD D FOR RIGHT HAND TWISTED OR G FOR LEFT HAND TWISTED

Dead ends are made of high strength aluminium alloy or aluminium clad steel wires or galvanized steel wires

Other sizes available on request

All dimensions in mm * We reserve the right to change design & construction without prior notice