


Insulator Suspension - B&S Type

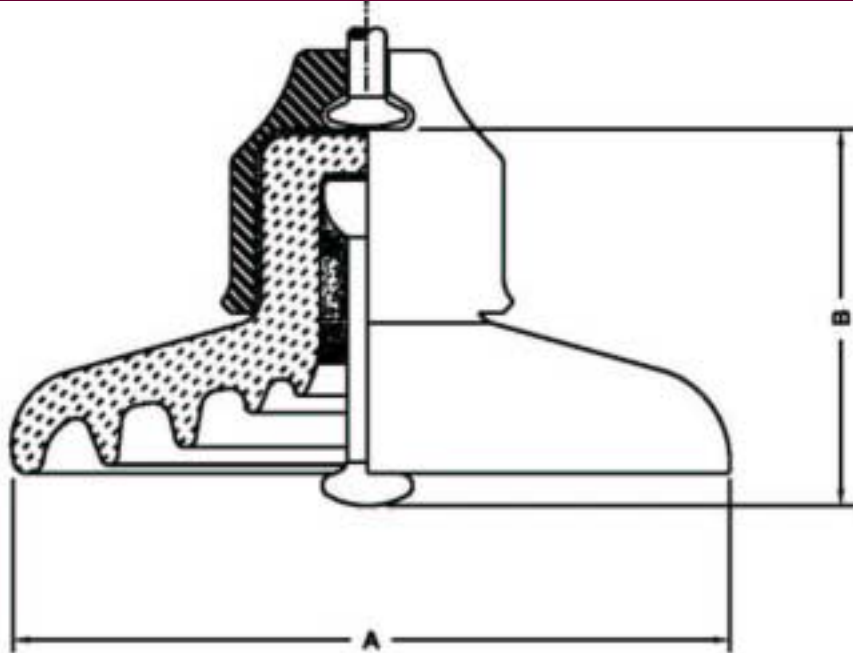

Catalog		Unit	IDN-45	IDN-70	IDN-90	IDN-120
Porcelain Diameter		Mm	255	255	255	255
Porcelain Spacing		Mm	145	145	145	145
Creepage distance	Protected	Mm	165	165	165	165
Creepage distance	Total	Mm	292	292	292	292
Combined EMS		Kn	45	70	90	120
Flashover voltage	Power frequency dry	kV	75	75	75	75
Flashover voltage	Power frequency wet	kV	45	45	45	45
Flashover voltage	Impulse positive	kVP	115	115	115	115
Flashover voltage	Impulse negative	kVP	120	120	120	120
Withstand voltage	Power Frequency dry	kV	70	70	70	70
Withstand voltage	Power Frequency wet	kV	40	40	40	40
Withstand voltage	Impulse positive	kVP	115	115	115	115
Withstand voltage	Impulse negative	kVP	110	110	110	110
Puncture voltage		kV	110	110	110	110
B&S size			16mmB	16mmB	16mmB	20mm
Net weight		Kgs	5.0	5.2	5.2	5.6

Other sizes available on request

All dimensions in mm * We reserve the right to change design & construction without prior notice

@ A.Damiano & Company: GPO Box:893:Calcutta 700001:India :E mail:damiano@vsnl.com: Web:www.adamiano.com

DAMIANO