



## Pole line hardware's Hex headed bolts

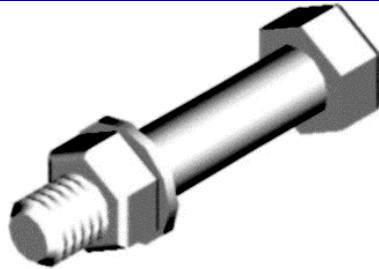

Cut or rolled threads

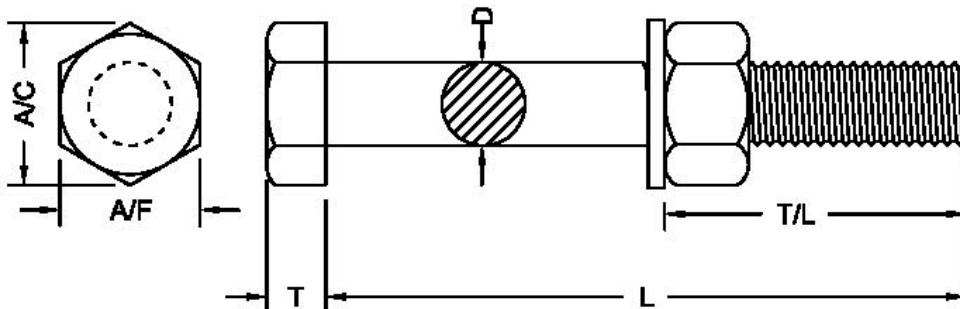

Nom	Diameter	Width a/f	Width a/c	Height ( T )	Pitch
M08	7.42-8.58	12.57-13.00	14.20-15.00	5.12-5.87	1.25
M10	9.42-10.58	16.57-17.00	18.72-19.60	6.55-7.45	1.50
M12	11.30-12.70	18.48-19.00	20.88-21.90	7.55-8.45	1.75
M16	15.30-16.70	23.16-24.00	26.17-27.70	9.55-10.45	2.00
M20	19.16-20.84	29.16-30.00	32.95-34.60	12.10-13.90	2.50
M22	21.16-22.84	31.00-32.00	35.03-36.90	13.10-14.90	2.50
M24	23.16-24.84	35.00-36.00	39.55-41.60	14.10-15.90	3.00

### THREAD LENGTHS

Nominal diameter of bolt	Length of thread
Upto and including 125MM	2D + 6 MM
Over 125MM upto and including 200 MM	2D + 12 MM
Over 200 MM	2D + 25 MM

Hex bolts supplied complete with one nut unless otherwise specified  
 Washers ( round and spring ) can be supplied if specified at additional cost  
 All ferrous parts hot dip galvanized to BS 729  
 Hex bolts and nuts confirm to requirement of BS 4190

Bolts available confirming to BS 3692 also  
 Available in Grade 4.6 , 5.6 , 8.0

Other sizes available on request  
 All dimensions in mm \* We reserve the right to change design & construction without prior notice